



**MITSUBISHI
ELECTRIC**

MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better

1500lm DLP 2000:1



SE2U

MICRO MOBILE SVGA PROJECTOR

***Take it with you.
Set it up fast !!***



SE2U

MICRO MOBILE SVGA PROJECTOR



Specifications


Model	SE2U
Display technology	1-chip DMD
Resolution	800 × 600 (total 480,000 pixels) 500 video lines
Brightness (conform to JIS)	1500 lumens
Color	16,770,000 colors
Contrast ratio	2000:1 (on/off)
Zoom/Focus	Manual Focus & Zoom Lens
Picture Size	40"~180" (100"=3.3m)
Source lamp	200W/2000Hrs (normal mode) 160W/2500Hrs (low mode)
Computer compatibility	SVGA (640 × 400 ~ 1280 × 1024) True:800 × 600, Sync on Green available
Video compatibility	NTSC/NTSC4.43/PAL (Including PAL-M, PAL-N) / SECAM / PAL60 / NTSC (480i) / 480p / PAL (576i) / 576p / 720p, HDTV (1080i)
Input terminals	PC : D-sub 15pin × 1, Audio : Φ3.5mm stereo mini jack × 1 Video : RCA × 1 + S-Video × 1
Output terminal	D-sub 15pin × 1
Communication terminal	USB terminal for mouse port (page up and down only)
Audio speaker	1W Mono
Fan noise	28dBA
Dimension (L × W × H)	220 × 283 × 89mm
Weight	2.9kg
Power supply	AC100-240V, 50/60Hz

*VGA and SXGA are registered trademarks of IBM Corporation. *DLP (Digital Light Processing) is a trademark of Texas Instruments. *All brand names and product names are trademarks, registered trade names of their respective holders.

Replacement Lamp : VLT-SE2LP

Screen size and Projection distance

As seen from the side

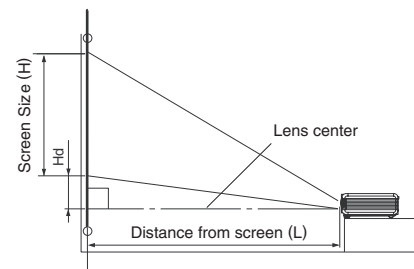

Screen size chart (4:3 aspect ratio)


Screen				Distance from screen (L)				High projected image (Hd)			
Diagonal size		Width (W)		Height (H)		Minimum Zoom		Maximum Zoom		High projected image (Hd)	
inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm
40	102	32	81	24	61	52	1.3	65	1.6	4.0	10.1
60	152	48	122	36	91	79	2.0	97	2.5	6.0	15.1
80	203	64	163	48	122	105	2.7	129	3.3	7.9	20.1
100	254	80	203	60	152	131	3.3	161	4.1	9.9	25.1
150	381	120	305	90	229	197	5.0	242	6.2	14.8	37.7
180	457	144	366	108	274	236	6.0	290	7.4	17.8	45.3

Screen size chart (16:9 aspect ratio)

Screen				Distance from screen (L)				High projected image (Hd)			
Diagonal size		Width (W)		Height (H)		Minimum Zoom		Maximum Zoom		High projected image (Hd)	
inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm
40	102	35	89	20	50	58	1.5	71	1.8	7.6	19.2
60	152	52	133	29	75	86	2.2	106	2.7	11.3	28.8
80	203	70	177	39	100	115	2.9	141	3.6	15.1	38.4
100	254	87	221	49	125	144	3.7	177	4.5	18.9	47.9
150	381	131	332	74	187	216	5.5	265	6.7	28.3	71.9
180	457	157	398	88	224	259	6.6	315	8.1	34.0	86.3


The above numbers are approximate, and may be slightly different from the actual measurements.

Input and Output Terminals

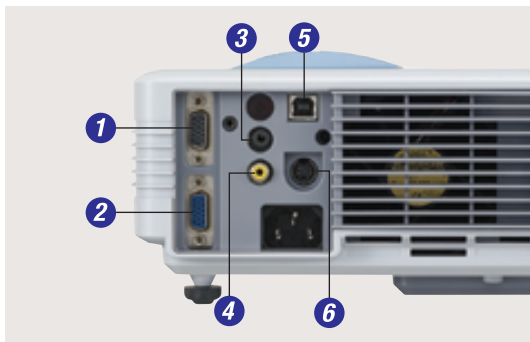

- 1 PC Output
- 2 PC Input
- 3 Audio Input
- 4 Video Input
- 5 USB
- 6 S-Video Input

Dimensions

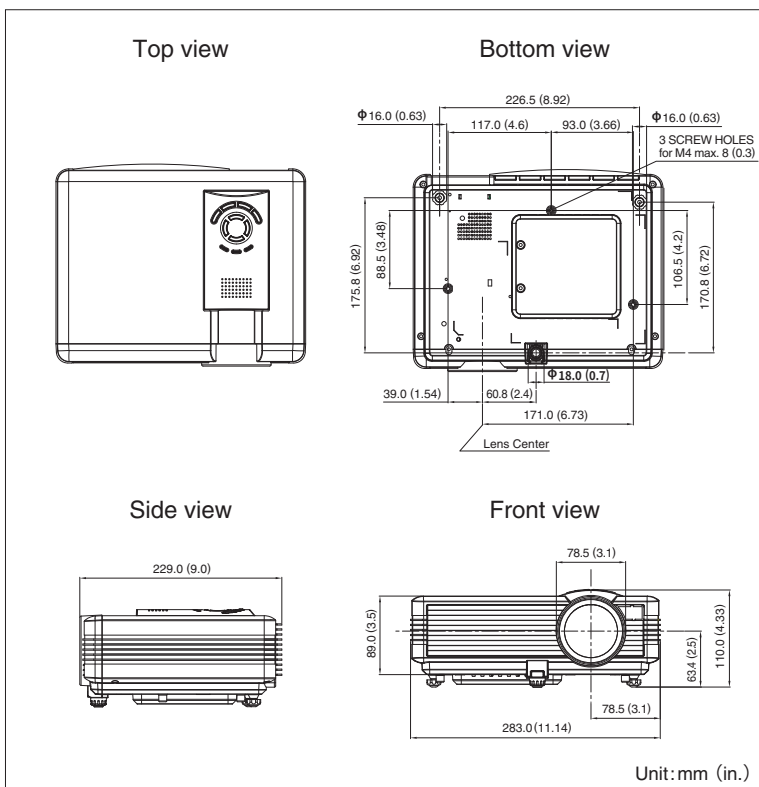

MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE: MITSUBISHI DENKI BLDG., 2-2-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

To find out more about SE2U and our projectors, visit us at

Global.MitsubishiElectric.com/projectors/