




**MITSUBISHI
ELECTRIC**

MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better

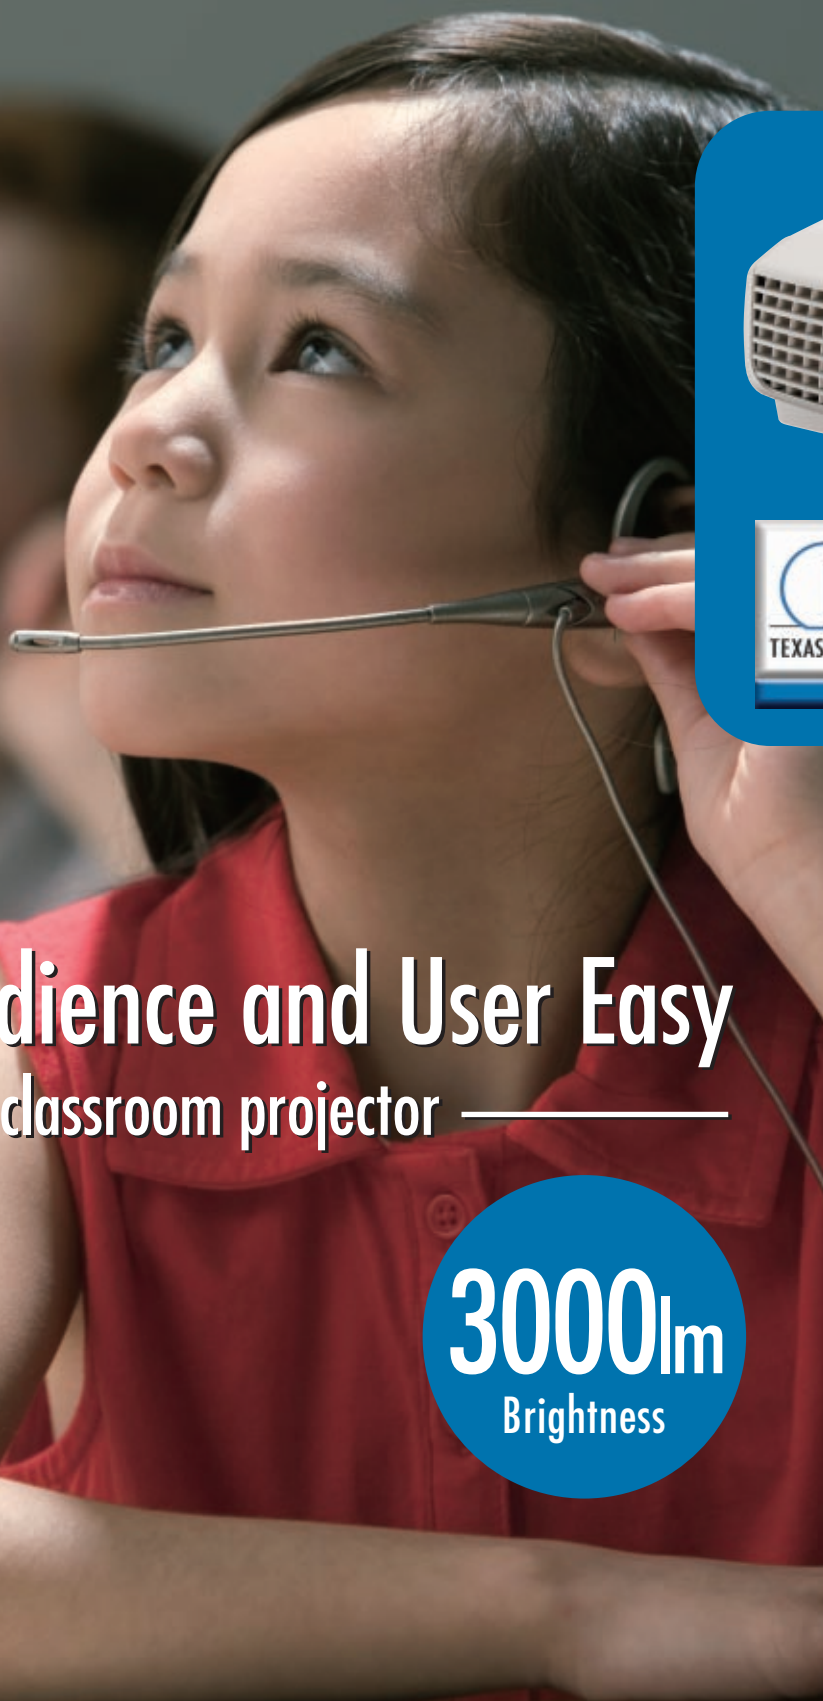

Audience and User Easy
Our classroom projector

3000lm
Brightness



XD470U
MOBILE XGA PROJECTOR

Instant Shutdown

For quick exits after the show, just pull the powercord in standby mode, without waiting for unit cool down. This "Instant Shutdown" feature is a welcome time saver when hustling between classes or meetings.

Page-Feed Function for Smooth Classroom Presentations

Linking the projector to a PC with the accessory USB cable enables page feed for PowerPoint data and other information, using only the remote controller Up/Down button. Another pivotal backup to ensure even smoother classroom presentations.

Note: The page-feed function is limited to software that supports page feed from the keyboard page up/down key.

Trapezoid Distortion Correction

Even if the screen turns trapezoidal when projecting images, lengthwise direction warp is easily adjustable by remote controller. This is a handy touch when pressed for setup time and space.



Breath easy, even with the projector out of sight

Setting the four-digit password makes it possible to suppress projector key operation. Passing a chain through the projector hook prevents unauthorized removal when the operator is absent from the location, providing an effective anti-theft measure.

Note: In the event of theft, Mitsubishi Electric does not assume responsibility for compensation.





XD470U


MOBILE XGA PROJECTOR

Specifications

Model	XD470U
Display technology	0.55"1-Chip DMD
Resolution	1024 x 768 (total 786,432 pixels)
Brightness	3000lm
Contrast	2000:1
Picture Size	40"~300"
Source lamp	230W (Shut Off Time 3000Hrs) with Low Mode 280W (Shut Off Time 2000Hrs)
Computer compatibility	640 x 480 ~ 1280 x 1024 True: 1024 x 768, Sync on green available
Video compatibility	NTSC/NTSC4.43/PAL(including PAL-M, N)/SECAM/PAL-60, Component Video : 480i/p(525i/p), 576i/p(625i/p), 720p(750p), 1080i(1125i 60Hz), 1080i(1125i 50Hz)
Input terminals	RGB : mini D-sub15pin x 2, Audio : stereo mini jack x 1, Video : RCA x 1 + S-video x 1
Output terminals	RGB : mini D-sub15pin x 1, Audio : stereo mini jack x 1, DC Out : 5V 1.5A (MAX)
Communication terminals	RS-232C(D-sub 9pin) x 1, USB terminal for Page Up/Down
Audio speaker	2W mono
Dimension(WxHxD)	261 x 87 x 265mm (excluding height adjustment)
Weight	2.8kg / 6.2lbs
Power supply	AC100-240V, 50/60Hz
Optional lamp	VLT-XD470LP


*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Input and Output Terminals

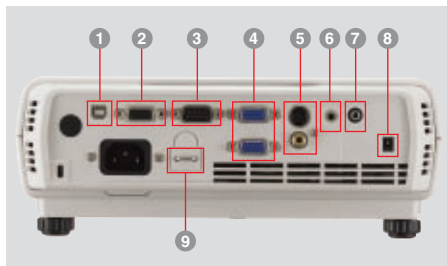


- 1 USB terminal for Page Up/Down
- 2 PC / Component Video output
- 3 Serial RS-232C
- 4 PC / Component Video input (mini D-sub 15pin)
- 5 S-Video / RCA
- 6 Audio input
- 7 Audio output
- 8 DC Out
- 9 Security Hook

Dimensions

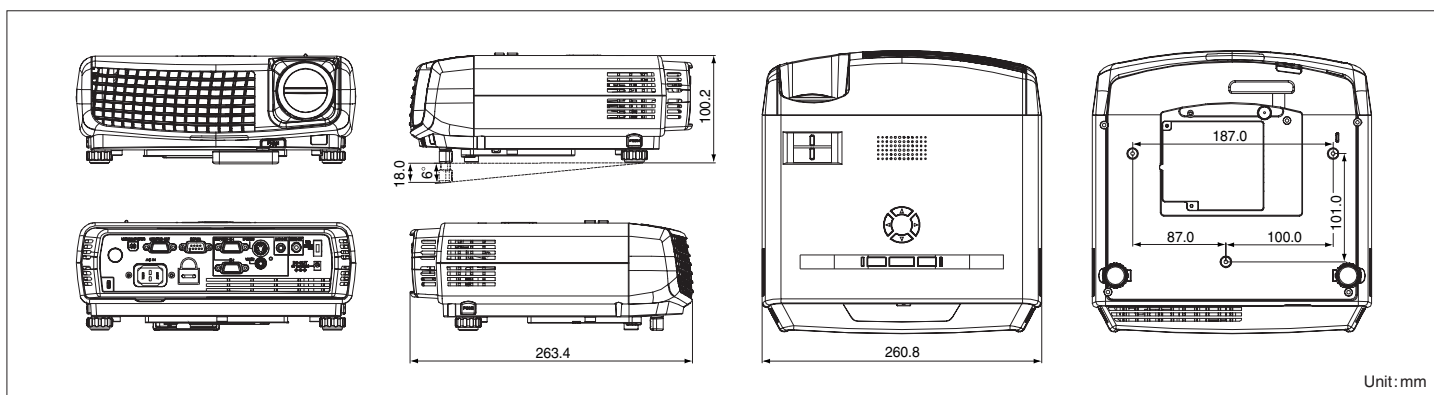

Screen size and Projection distance

As seen from the side

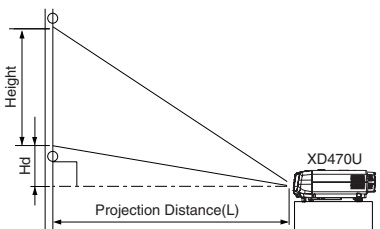

Screen size chart

Screen (4:3 aspect ratio)					Distance from screen (L)					Height projected image (Hd)	Screen (16:9 aspect ratio)					Distance from screen (L)					Height projected image (Hd)		
Diagonal size		Width (W)		Height (H)	Shortest		Longest				Diagonal size		Width (W)		Height (H)	Shortest		Longest					
inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm		
40	102	32	81	24	61	50	1.3	60	1.5	3.5	9	40	102	35	89	20	50	55	1.4	66	1.7	6.7	17
60	152	48	122	36	91	76	1.9	91	2.3	5.2	13	60	152	52	133	29	75	82	2.1	99	2.5	10.1	26
80	203	64	163	48	122	101	2.6	121	3.1	7.0	18	80	203	70	177	39	100	110	2.8	132	3.3	13.5	34
100	254	80	203	60	152	126	3.2	151	3.8	8.7	22	100	254	87	221	49	125	137	3.5	165	4.2	16.9	43
150	381	120	305	90	229	189	4.8	227	5.8	13.1	33	150	381	131	332	74	187	206	5.2	247	6.3	25.3	64
200	508	160	406	120	305	252	6.4	302	7.7	17.4	44	200	508	174	443	98	249	275	7.0	329	8.4	33.7	86
250	635	200	508	150	381	315	8.0	378	9.6	21.8	55	250	635	218	553	123	311	343	8.7	412	10.5	42.2	107
300	762	240	610	180	457	378	9.6	—	—	26.1	66	300	762	261	664	147	374	412	10.5	—	—	50.6	129

The above numbers are approximate, and may be slightly different from the actual measurements.

MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

To find out more about XD470U and our projectors, visit us at

Global.MitsubishiElectric.com/projectors/